





Features

- 34kg (75lb) Load capacity
- Six-way dimensional adjustment clip device
- Elongated holes for depth adjustment

Description

- Concealed drawer runners with Push-open and Soft-close functionality
- Ideal for frameless and blocked-out face frame cabinets
- Offered in lengths ranging from 457mm (18") to 610mm (24")
- Compatible with material thicknesses from 16mm (5/8") to 19mm (3/4")
- Allows the push latch mechanism drawer to open effortlessly with a gentle touch on the drawer front, while also integrating a soft-close feature for quiet closing
- Streamlined concealed design facilitates easy installation
- Durable runners ensure consistently smooth and controlled drawer glide

Applications



Cabinet and runner comparison

Overall cabinet depth	Drawer length	Runner SKU number
533mm (21")	457mm (18")	TCH-23403 19.457.3D
610mm (24")	533mm (21")	TCH-23403 19.533.3D
686mm (27")	610mm (24")	TCH-23403 19.610.3D

Runner set and components



TCH-23000 CL.3D




TCH-23403 - 19mm

Drawer and Cabinet Specifications



Drawer box specification

Front view

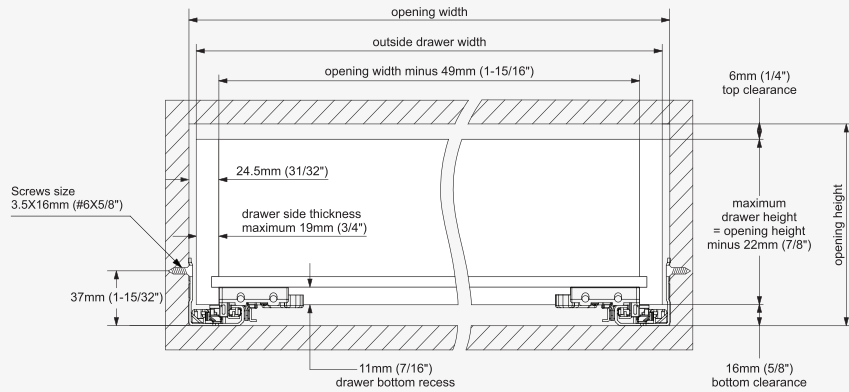

Note: The inside drawer width must equal Cabinet opening width minus 49mm (1-15/16") to align and function optimally


Calculating outside drawer width

For drawer side panel thickness	19mm (3/4")	18mm (23/32")	17mm (21/32")	16mm (5/8")	15mm (19/32")
Deduct from inside cabinet width	11mm (7/16")	13mm (1/2")	15mm (19/32")	17mm (21/32")	19mm (3/4")


Example: For 508mm (20") inside cabinet width and a 19mm (3/4") thick drawer panel, 508mm (20") minus 11mm (7/16") = 497mm (19 9/16") drawer width.

Drawer back preparation

Rear view



Runner mounting specifications

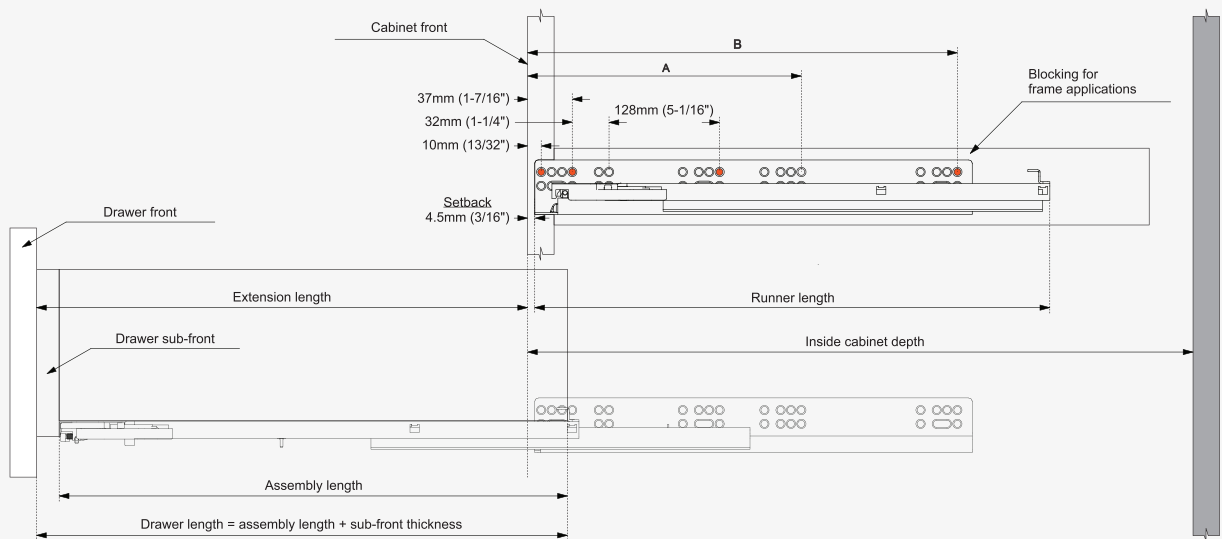

Note: The orange dots show the locations where fixing screws should be installed to achieve the specified load ratings

Runner SKU number	Nominal length	Runner length	Assembly length	Extension length	Screw locations for frameless cabinet		Inside cabinet depth Minimum
					A	B	
TCH-23403 19.457.3D	457mm (18")	470mm (18-1/2")	441mm (17-3/8")	419mm (16-1/2")	-	261mm (10-9/32")	495mm (19 1/2")
TCH-23403 19.533.3D	533mm (21")	546mm (21-1/2")	517mm (20-3/8")	495mm (19-1/2")	261mm (10-9/32")	325mm (12-13/16")	572mm (22 1/2")
TCH-23403 19.610.3D	610mm (24")	623mm (24-1/2")	594mm (23-3/8")	572mm (22-1/2")	261mm (10-9/32")	421mm (16-9/16")	648mm (25 1/2")